

stored energy solutions for a demanding world



Model: **60PzV300**

Ares series

Ares range battery adopts traditional tubular gel technology, adopts patent gel electrolyte. The products are used as standby power for communication, power, military and broadcast and television system. They possess precise ABS heat seal technology between container and lid and patented post seal structure. Provide better deep cycle performance versus AGM. The design float life is 18+ years.



Specifications

Battery Model	60PzV 300
Nominal Voltage	2V
Rated Capacity	300Ah (10hour rate) to 1.80V/cell @25°C(77°F)
Typical Weight	28kg
Internal Resistance	Approx 0.615mΩ
Operating Temperature Range	Operation (maximum): -40°C to 55°C(-40°F to 131°F)
	Operation (recommended): 15°C to 25°C(59°F to 77°F)
	Storage: -20°C to 40°C(-4°F to 104°F)
Float Voltage	2.23V/cell@25°C(77°F)
Charge Current	30A(Recommendation) 75A(Maxmum)
Equalize and Cycle Service	2.35V~2.40V/cell@25°C(77°F)
Self Discharge	The residual capacity is above 94% after 90 days storage(25°C/77°F)
Terminal	M8 Female Large Size Copper Post
Terminal Hardware Torque	15 ± 1.0Nm
Container Material	ABS (V0 optional)

Discharge Data with Constant Current Units : Amperes (25°C, 77°F)

End voltage	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	16h	24h	48h	100h
1.60V	329	263	180	112	81	64	54.8	48.2	38.8	31.8	20.5	14.3	7.8	4.4
1.65V	318	254	176	109	79	63	54.2	47.6	38.5	31.7	20.4	14.3	7.8	4.3
1.70V	299	244	170	107	78	62	53.4	46.8	38.1	31.5	20.3	14.1	7.7	4.3
1.75V	284	235	166	104	76	61	52.5	45.9	37.3	31.1	20.0	13.8	7.6	4.1
1.80V	250	215	158	100	75	60	51.3	44.7	36.5	30.1	19.4	13.5	7.5	4.0
1.85V	211	181	146	95	72	58	49.7	43.2	35.4	29.7	19.2	13.1	7.1	3.9
1.90V	159	154	117	83	65	54	46.2	39.9	32.1	26.7	17.2	12.0	6.7	3.6

Discharge Data with Constant Power Units: Watts per cell (25°C, 77°F)

End voltage	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	16h	24h
1.60V	658	521	399	219	166	132	111.1	97.3	79.9	67.1	43.2	29.4
1.65V	627	494	371	218	165	131	110.4	96.6	79.3	66.6	42.9	29.2
1.70V	598	471	348	215	163	130	108.9	95.3	78.2	65.7	42.4	28.8
1.75V	566	452	327	209	159	125	105.0	93.2	77.0	64.5	41.6	28.4
1.80V	530	434	309	201	155	122	100.2	87.7	73.4	61.2	39.5	26.9
1.85V	496	417	287	194	147	116	97.5	84.1	69.7	58.7	37.9	25.8
1.90V	463	381	256	176	142	111	94.6	76.3	63.2	53.2	34.3	23.3






stored energy solutions for a demanding world

NARADA

Model: **60PzV300**

Ares series

Dimensions-mm[inch]

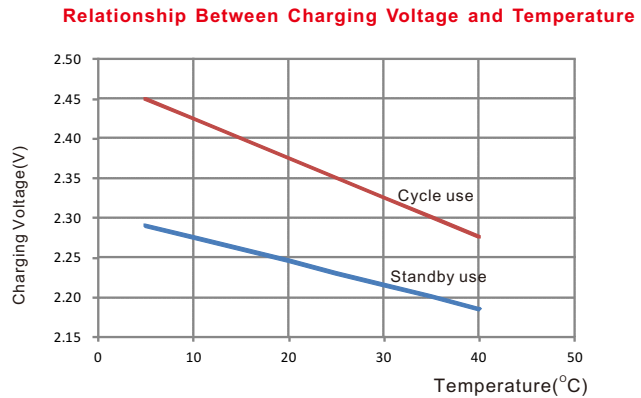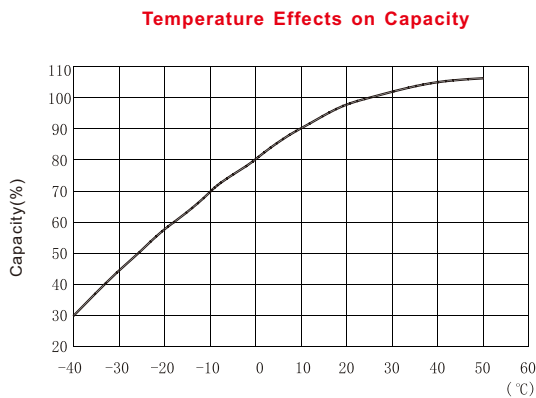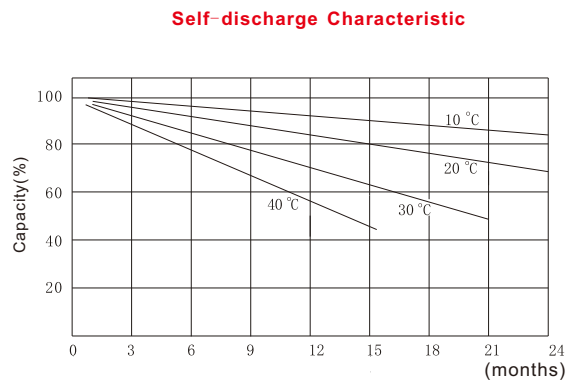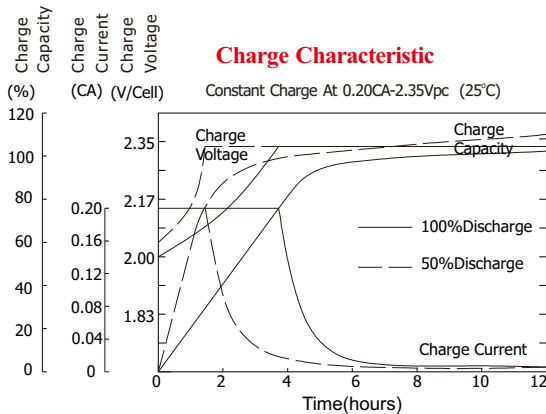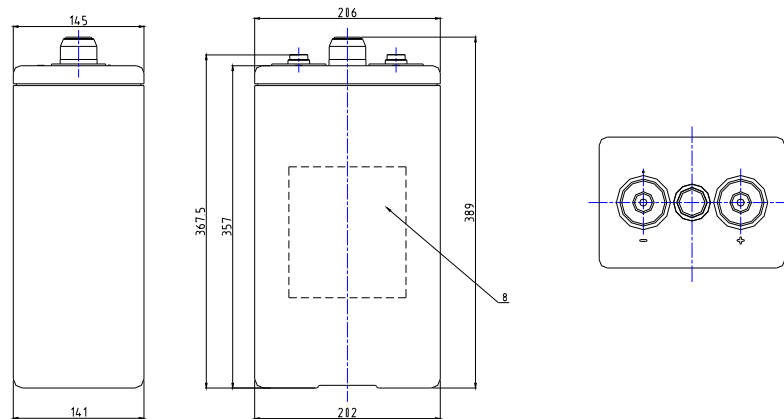

NARADA POWER SOURCE CO.,LTD.
9F, Building A, No. 50 Zijinghua Road, Hangzhou, China
Tel: +86-571-28827013 Fax: +86-571-28828290
Website: www.naradabattery.com E-mail: intl@narada.biz

NARADA ASIA PACIFIC PTE.LTD.
65 Ubi Crescent #07-05 HOLA centre, Singapore
Tel: +65-6848 1191 Fax: +65-6749 3498
E-mail: sales@narada.com.sg

NARADA EUROPE (UK) LIMITED
Spectrum House, Dunstable Road, Redbourn,
St. Albans, Herts AL3 7PR
Tel: +44 (0)845 371 7095 Fax: +44 (0)845 612 2031
E-mail: sales@naradaeurope.com

