

ICS series

ICS-400


Narada's ICS series battery designed to provide highcycling and fast charge performance, idea for telecom service where power supply is unstable. With innovative structure design, high quality manufacturing and high quality material, ICS batteries are also capable of PSoC, hybrid, renewable energy storage application and other cycling/standby applications.



Specifications

| | | |
|----------------------------|--|------------|
| Battery Model | ICS-400 | |
| Nominal voltage | 2V | |
| Capacity | 400Ah (10HR ,40A, 1.80V, 25°C) | |
| Approx.Weight | 27kg | |
| Internal Resistance | Approx 0.35mΩ | |
| Max Charge Current Allowed | 100A | |
| Charge Voltage (25°C) | Cycle use | Float use |
| | 2.35V/cell | 2.25V/cell |
| Temperature Ranges | Operation(maximum): -40°C to 55°C (-40°F to 131°F) | |
| | Operation(recommended): 15°C to 25°C (59°F to 77°F) | |
| | Storage: -20°C to 40°C (-4°F to 104°F) | |
| Terminal | M8 Female | |
| Terminal Hardware | 15 ± 1.0 N.m | |
| Container Material | ABS (V0 optional) | |

Dimensions (mm)

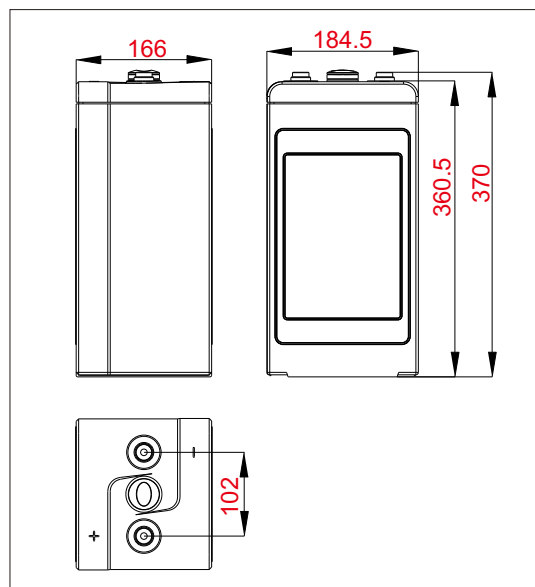

Constant Current Discharge Data Units: Amperes (25°C, 77°F)

| End voltage per cell | 15min | 20min | 30min | 40min | 50min | 1h | 2h | 3h | 5h | 8h | 10h |
|----------------------|-------|-------|-------|-------|-------|-----|-----|-----|------|------|------|
| 1.65V | 495 | 450 | 365 | 315 | 270 | 227 | 140 | 104 | 72.0 | 49.0 | 44.0 |
| 1.70V | 460 | 410 | 340 | 300 | 245 | 225 | 137 | 102 | 69.0 | 47.0 | 43.0 |
| 1.75V | 410 | 370 | 320 | 280 | 230 | 223 | 135 | 100 | 67.0 | 45.0 | 42.0 |
| 1.80V | 365 | 330 | 305 | 260 | 225 | 221 | 132 | 98 | 65.0 | 43.0 | 41.0 |


Constant Power Discharge Data Units: Watts per cell (25°C, 77°F)

| End voltage per cell | 15min | 20min | 30min | 40min | 50min | 1h | 2h | 3h | 5h | 8h | 10h |
|----------------------|-------|-------|-------|-------|-------|-----|-----|-----|-----|-----|-----|
| 1.65V | 910 | 810 | 700 | 580 | 520 | 440 | 290 | 225 | 160 | 112 | 105 |
| 1.70V | 840 | 780 | 640 | 570 | 505 | 420 | 275 | 220 | 150 | 103 | 95 |
| 1.75V | 800 | 720 | 610 | 520 | 470 | 415 | 270 | 215 | 140 | 95 | 90 |
| 1.80V | 710 | 650 | 550 | 490 | 420 | 405 | 260 | 210 | 130 | 86 | 80 |


ICS series

ICS-400


Discharge Voltage vs Time Curve (25°C)

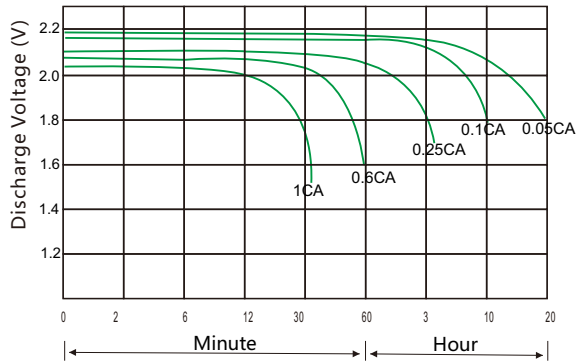


Charge Curve (25°C)

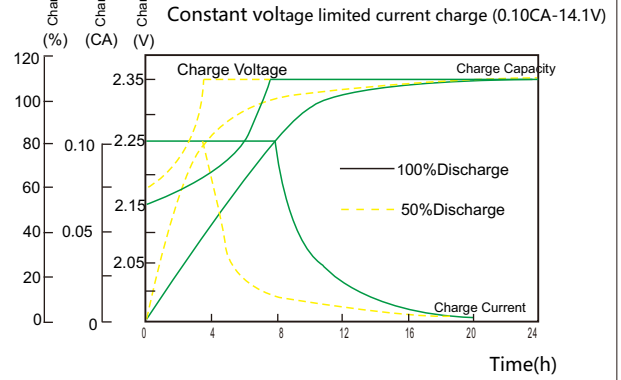


Capacity vs temperature curve

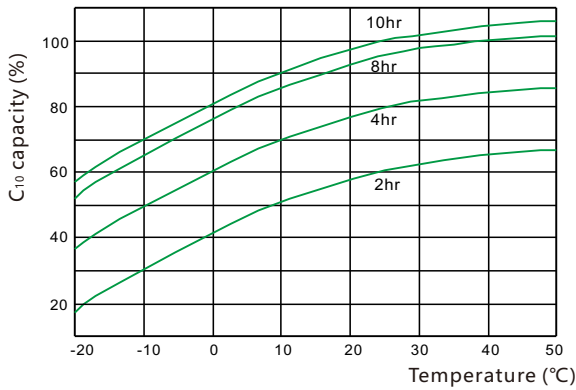


Residual Capacity vs Storage Time

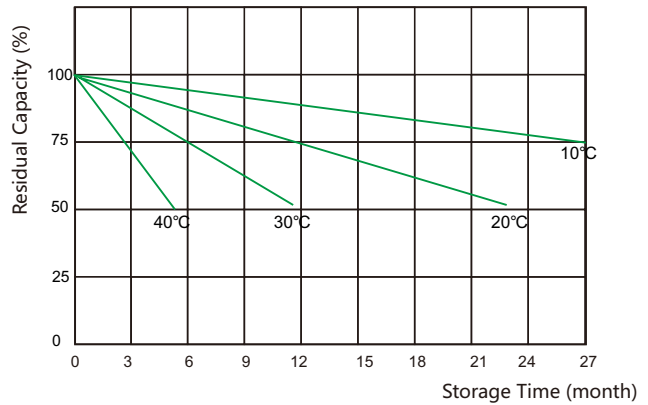

Capacity vs OCV curve

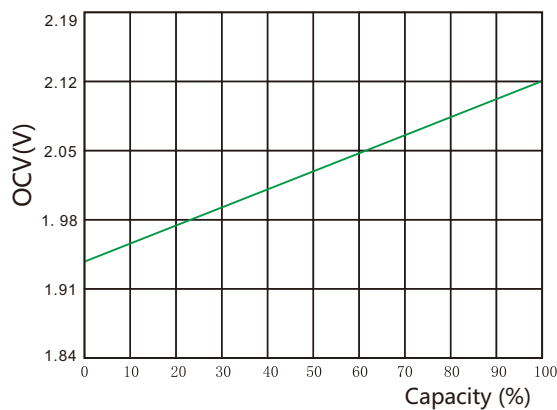

Design life vs temperature

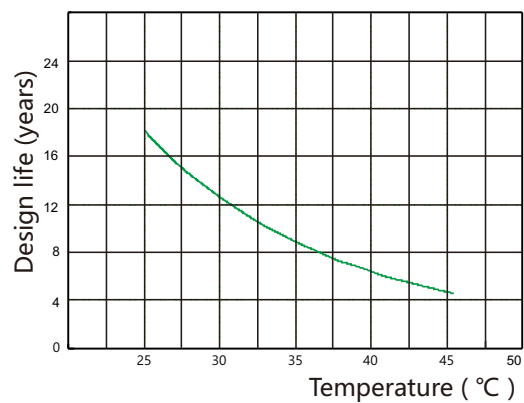

NARADA POWER SOURCE CO.,LTD.
 Building A, No.822 Wen'er West Road, Hangzhou, China
 Tel:+86-571-56975980 Fax:+86-571-56975955
 E-mail: intl@narada.biz
 Website:www.naradapower.com

NARADA ASIA PACIFIC PTE.LTD.
 Block 9 Khaki Bukit Road 1 #02-10 Eunos Technolink,
 Singapore 415938 Email: sales@narada-ap.com
 Tel: +65-6848 1191 Fax: +65-6749 3498
 Website: www.narada-ap.com

NARADA EUROPE (UK) LIMITED
 Spectrum House, Dunstable Road, Redbourn,
 St. Albans, Herts AL3 7PR
 Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031
 E-mail: sales@naradaeurope.com

