

Narada NPFC series is a complete range of 48V LiFePO₄ (Lithium Iron Phosphate) battery products, for a wide variety of applications, such as telecom base station, UPS, renewable energy system, etc., with advanced life, standard size, light weight and strong environmental adaptability.




Battery Management System (BMS)

For standard Narada lithium battery module, BMS is applied to monitor voltage, current, temperature of cells and module, take protections against over-charge, over-discharge, over-current, over-temperature, under-temperature and short circuit, etc., and provide cell balancing and current limitation during charging process to ensure a reliable safety and excellent performance.

Meantime, Narada supply customized upper computer software for BMS communication via RS485 to set parameters or read monitoring data.

Dimensions

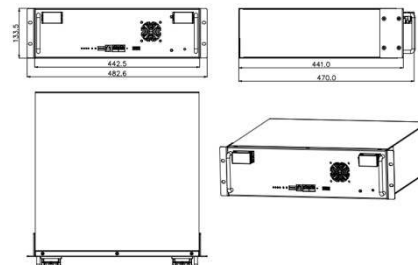

Specifications		
1. Nominal Voltage		48 VDC
2. Nominal Capacity (100% DOD discharge @25°C, 0.2C, 5 hours continuously discharge)		100 Ah (0.2C to 42.0V @25°C)
3. Number of Cell		15 cells
4. Battery Weight (Approximate)		39kg±2%
5. Dimensions	Width * Depth * Height	482.6mm*410mm*133.5mm (rack 19 inch mounted)
6. Energy	Normal energy (@25°C, 0.5C)	4800 Wh
	Gravimetric energy density	≥ 120 Wh/kg
7. Cell	Technology	LFP (Lithium Iron Phosphate)
	Cell model	FE100
	Cell voltage (Nominal)	3.2 V
	Cell capacity (Nominal)	100 Ah
	Gravimetric energy density of cell	≥ 160 Wh/kg
8. Internal Impedance @25°C ÷ 45°C, full charging		≤ 20 mΩ
9. Standard Discharge @25°C	Max. constant current	100 A
	Cut-off voltage	40.5 V
10. Standard Charge @25°C	Charging Voltage Limited	54±0.5 V
	Max. constant current	100 A
	Recommended charging current and time	20 A (0.2C) for 5.2 hours
11. Discharge/Charge efficiency in Wh (Round trip efficiency) @0.2C		≥ 95%
12. Self-discharge rate @25°C		≤ 3%Cr/ month
13. Cell consistency	Deviation from the maximum capacity, minimum capacity, to the average capacity of all cells when fully charged	Less than ± 1%
	Deviation from the maximum IR (internal resistance), minimum IR, to the average IR of all cells when fully charged	Less than ± 15%
	The voltage difference between the highest and lowest cells when the battery is fully charged	≤ 0.05V
	The voltage difference between the highest and lowest cells during discharge @100% DOD&0.2C	≤ 0.3V
14. Design Life @25°C		≥ 12 years
15. Operating Temperature	Charging:	0°C ~ 60°C
	Discharging:	-20°C ~ 60°C

16. Storage Temperature	Recommended range: 0°C ~ 40°C
17. Operating Humidity (@40±2°C, %RH)	5% ~ 95%
18. Increment of tempt after 5 continuous charge/discharge cycles @0.5C, 50 C	≤ 20 C
19. Ingress Protection (IP)	IP20
20. Certification	UL1973, UN38.3, CE, YDT

BMS Parameters

No.	Type	Function	Setting Value	Remarks	
1	Voltage	Charge	Cell Voltage Protection	3.5V Alarm/3.6V Protection	Recover at 3.35V
2			Total Voltage Protection	56V Alarm/57V Protection	Recover at 50.2V
3		Discharge	Cell Voltage Protection	2.7V Alarm/2.6V Protection	Recover at 2.9V
4			Total Voltage Protection	43.2V Alarm/42V Protection	Recover at 45V
5	Current	Charge	Normal	≤100A	
6			Discharge	Normal	≤100A
7		Over Current Protection 1		Alarm > 100A / Protection > 105A	Delay 20s, recovery in every 10min
		Over Current Protection 2		> 125A and < 200A	Delay 3s, recovery in every 10min
8		Short Circuit Protection	≥300A	Delay 300uS	
9	Temp	Cell Temp	Low temp protection	Charging < - 10°C Discharging < - 25°C	Delay 1~2S
10			High temp protection	Charging: Alarm > 65°C / 70°C Protection Discharging: Alarm > 65°C / 70°C Protection	Delay 1~2S
11		PCB	High temp protection	Alarm > 90°C / > 115°C Protection	Recovery at 85°C
12	Cell Balance	Balance	Make all cells be balance during charging process	$V_{Max} \geq 3.40V$ and $V_{Max} - V_{Min} \geq 30mV$, start balance	All cell voltages < 3.4V or $V_{Max} - V_{Min} \leq 30mV$, or discharge stop balance
			Current: 150mA		

Layout of Front Panel		
1	Status Indicators by LED	SOC / ALM / RUN
2	Communication Ports	RS485*2, RS232*1
3	Communication in Parallel	16 modules in maximum
4	ON/OFF Switch	Available
5	Reset Key	Available
6	Terminal Size	2M8 (Screw size), with protection cover
7	Dry Contact	Available



Constant Current Discharge Characteristics (25°C,77°F)

Current(A)	0.1C	0.2C	0.35C	0.5C	0.6C	0.8C	1C
End voltage - Time	Hours						
46.5V	9.73	4.85	2.93	1.90	1.43	1.15	0.90
45.0V	9.92	4.96	3.00	1.96	1.52	1.20	0.93
43.5V	10.05	5.03	3.05	2.00	1.55	1.23	0.96
42.0V	10.13	5.07	3.08	2.02	1.58	1.25	0.98
40.5V	10.18	5.10	3.09	2.03	1.63	1.26	1.00

Discharge Data with Constant Power (25°C,77°F)

Current(A)	480W	960W	1580W	2400W	2880W	3800W	4800W
End voltage - Time	Hours						
46.5V	9.83	4.89	2.92	1.85	1.43	1.05	0.90
45.0V	10.02	4.99	3.01	1.91	1.52	1.11	0.93
43.5V	10.13	5.05	3.05	1.95	1.55	1.15	0.96
42.0V	10.21	5.09	3.08	1.98	1.58	1.18	0.98
40.5V	10.25	5.12	3.09	2.00	1.63	1.20	1.00

Performance Curves

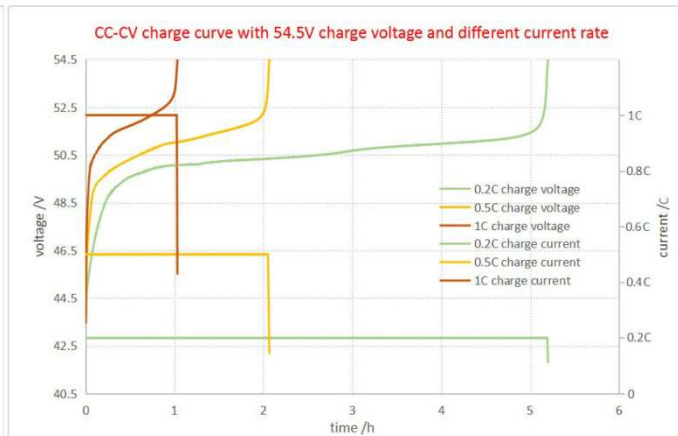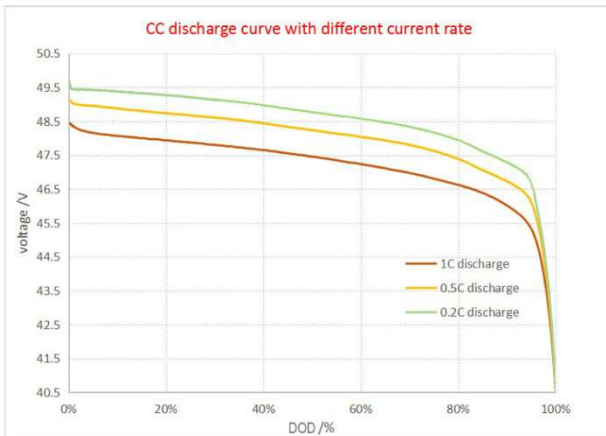

Disclaimers of warranties:

Copyright © Narada power source Co., Ltd. 2019. All rights reserved.

The information in this document may contain predictive statements including, without limitation, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements.

No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of Narada. All the data in datasheet is valid for single module operation. For parallel operation please ask Narada technical for guidelines.

Any datasheet issued previously is invalid when new version releases.