

OPzS

6OPzS300

OPzS Series

NARADA OPzS Series Lead Acid batteries are designed with a combination of die-casting Tubular positive framework and superfluous electrolyte technologies to offer a very high lever of reliability and a long service life. OPzS batteries used special filter and proof design to ensure no acid fog runs over and burning proof, and also convenient examine and maintenance.


The specification of Narada OPzS series batteries make if idea for a wide range of applications such as Telecommunications, Photovoltaic System, Security System, emergency lighting and UPS.

Features & Benefits

- Low maintenance.
- Super long service life.
- Transparent containers, convenient to observe.
- Special filter installation for acid fog proof.
- High quality and high reliability.
- Special pole sealed technology.
- DIN40736-1 compliant.


Construction

- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerSAN
- CoverABS
- TerminalCopper
- SeparatorRubber-PVC
- ElectrolyteSulfuric acid







Terminal Dimensions

Cell Dimensions

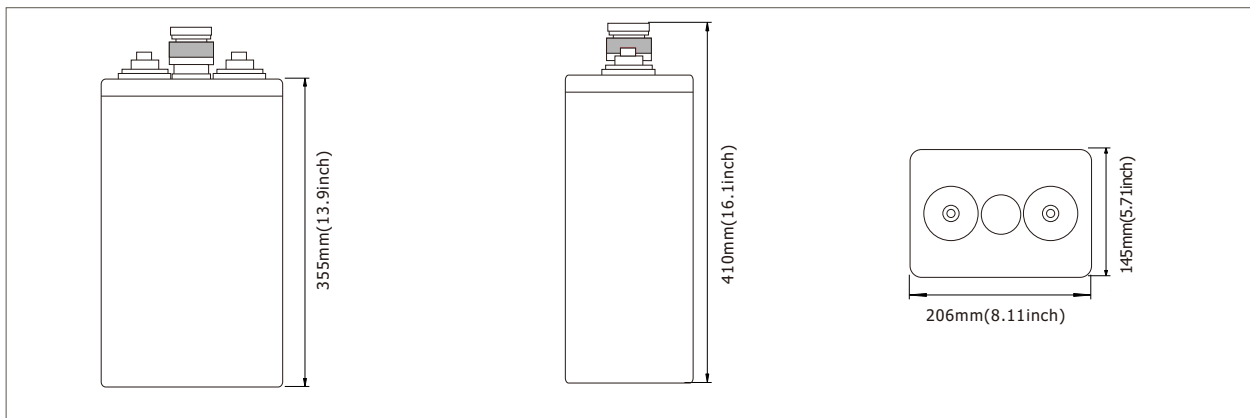

Battery Model	6OPzS300			
Designed Floating Life	20 Years			
Capacity(25°C)	24HR(13.6A,1.80V)	10HR(30A,1.80V)	5HR(50.4A,1.80V)	1HR(161A,1.75V)
	326AH	300AH	252AH	161AH
Dimensions	Length	Width	Height	Total Height
	145mm(5.71inch)	206mm(8.11inch)	355mm(13.9inch)	410mm(16.1inch)
Approx. Weight	without electrolyte:17.5Kg (38.6lbs)		with electrolyte:24.0Kg(52.9lbs)	
Internal Resistance	Full charged at 25°C: 0.00068 Ohm			
Self Discharge	3% of capacity declined per month at (20°C)			
Capacity Affected by Temp.(10HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.35-2.40V/cell(-5mV/cell/°C), max. Current: 75A		2.23V/cell(-3.0mV/cell/°C)	

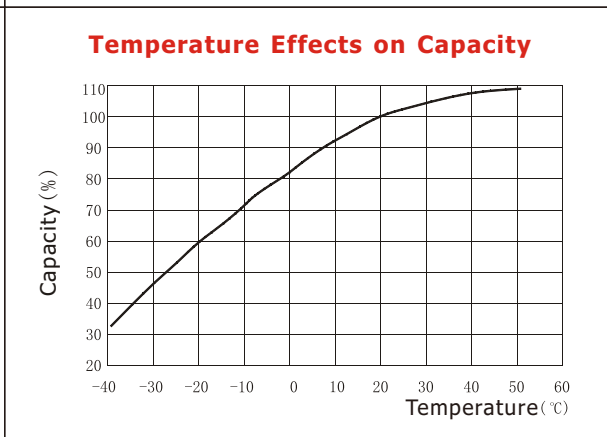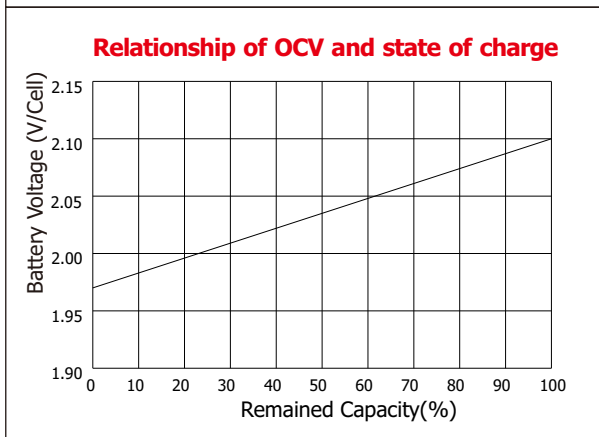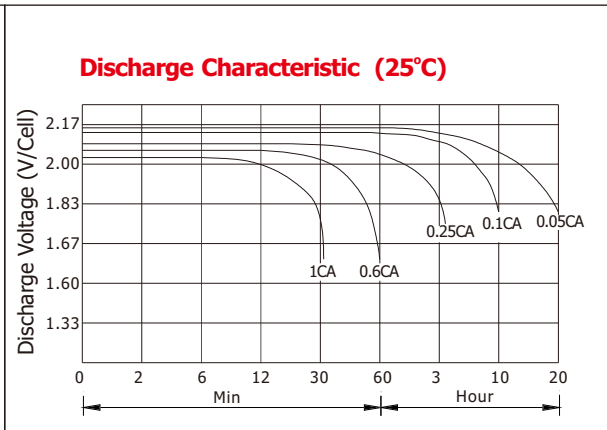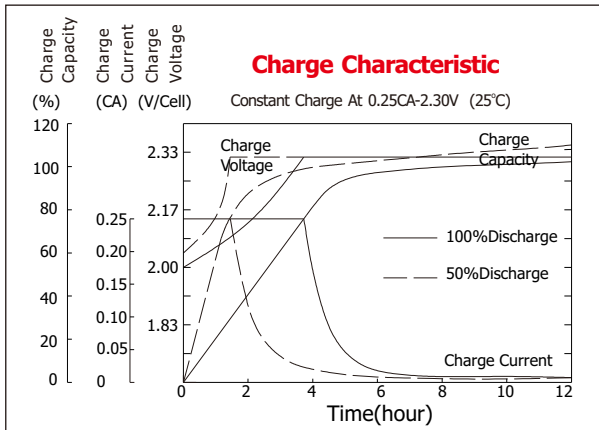

Constant Current Discharge Data Units: Amperes (25°C, 77°F)

End voltage	minutes	hours									
	30	1	2	3	4	5	6	8	10	24	48
1.60V	255.0	174.5	109.1	79.0	62.6	53.9	47.7	38.5	31.7	14.3	7.9
1.65V	246.2	170.7	106.2	76.9	61.7	53.3	47.1	38.3	31.6	14.3	7.9
1.70V	236.5	164.8	104.2	76.0	60.7	52.6	46.2	37.9	31.4	14.1	7.8
1.75V	227.9	161.0	101.3	74.1	59.8	51.7	45.4	37.1	31.1	13.8	7.7
1.80V	208.5	153.2	97.4	73.1	58.8	50.4	44.2	36.2	30.1	13.6	7.6
1.85V	175.5	141.6	92.6	70.1	56.8	48.9	42.7	35.2	29.6	13.2	7.1
1.95V	149.3	113.4	80.9	63.3	52.8	45.5	39.4	31.9	26.6	12.0	6.7

Constant Power Discharge Data Units: Watts per cell (25°C, 77°F)

End voltage	minutes	hours									
	30	1	2	3	4	5	6	8	10	12	24
1.60V	515.7	394.9	217.8	165.1	132.0	111.6	98.3	81.0	68.4	58.9	30.2
1.65V	488.9	367.2	216.8	164.1	131.0	110.9	97.5	80.4	67.9	58.6	30.0
1.70V	466.2	344.4	213.9	162.1	129.9	109.4	96.2	79.3	67.0	57.8	29.6
1.75V	447.4	323.7	207.9	158.1	125.0	105.5	94.0	78.1	65.7	57.1	29.2
1.80V	429.6	305.8	200.0	154.2	122.0	100.7	89.8	74.4	62.4	53.4	28.7
1.85V	412.8	284.1	193.0	146.3	116.0	98.0	86.3	72.5	59.8	51.3	28.0
1.95V	377.1	253.4	175.1	141.3	122.0	101.5	82.3	68.7	54.2	46.9	26.7

NARADA POWER SOURCE CO.,LTD.
No.459 Wensan Road, Hangzhou, Zhejiang, P.R.China
Tel:+86-571-28827013 Fax:+86-571-85126942
Website:www.naradabattery.com E-mail:intl@narada.biz

NARADA ASIA PACIFIC PTE.LTD.
65 Ubi Crescent #07-05 HOLA centre, Singapore
Tel: +65-6848 1191 Fax: +65-6749 3498
E-mail:sales@narada.com.sg

NARADA EUROPE (UK) LIMITED
Spectrum House, Dunstable Road, Redbourn,
St. Albans, Herts AL3 7PR
Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031
E-mail:sales@naradaeurope.com

